

# **BP-6 Series**

**High Flow Back Pressure Regulator** 

### Introduction

The BP-6 Series was originally designed as a back pressure regulator for reverse osmosis water purification systems. It may also be easily used in pilot facilities and large instrumentation systems. The standard 316 stainless seat assembly, which was intended for long term usage in sea water, can also be useful in various chemical environments. While the stainless seat assembly does not offer tight shutoff, it is not normally required in high flow systems. If a more positive shutoff is required a Teflon®/stainless seat assembly is available.

The BP-6 Series is normally provided in 316 stainless construction but other materials are available.



# ollessul.

### **Typical Applications**

- Pilot plants
- Large instrumentation systems
- Reverse osmosis water purification systems

### **Technical Data**

CONSTRUCTION	316L stainless steel (standard), Monel®, Hastelloy® C-276, or titanium (optional)
ADJUSTABLE STANDARD PRESSURE RANGES	0-100, 0-250, 0-500 and 0-1000 psig
OPERATING TEMPERATURE	-40° F to +500° F (-40° C to +260° C)
Cv COEFFICIENT	3.0
INLET & OUTLET CONNECTIONS	½″ FNPT

### **Features & Benefits**

- · Gas or liquid service
- Sensing with Teflon® lined stainless diaphragm
- Metal to metal seat

### **Options**

- Soft seat for bubble tight shutoff
- Panel mounting
- Extra ports
- Special welded connections
- Pressure gauges

### **GO Regulator**

405 Centura Court • PO Box 4866 (29305) • Spartanburg, SC 29303 Phone (864) 574-7966 Fax (864) 574-5608 www.goreg.com • sales@goreg.com


## **High Flow Back Pressure Regulators**

**Maximum Temperature and Control Pressures** 

SEAT MATERIAL	MAXIMUM TEMPERATURE	@	MAXIMUM CONTROL RANGE
Teflon®	200° F (93° C)	@	1000 psig (6.88 MPa))
316L stainless steel	500° F (260° C)	@	1000 psig (6.88 MPa)
Monel®	500° F (260° C)	@	1000 psig (6.88 MPa)
Hastelloy® C-276	500° F (260° C)	@	1000 psig (6.88 MPa)
Titanium	500° F (260° C)	@	1000 psig (6.88 MPa)


### **How to Order**

For additional configurations, consult the factory. Standard items in bold.

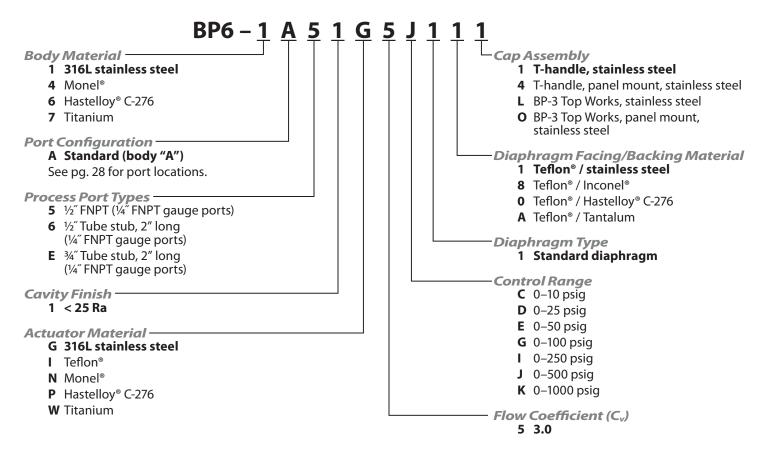

# **High Flow Back Pressure Regulators**

# **Outline and Mounting Dimensions**

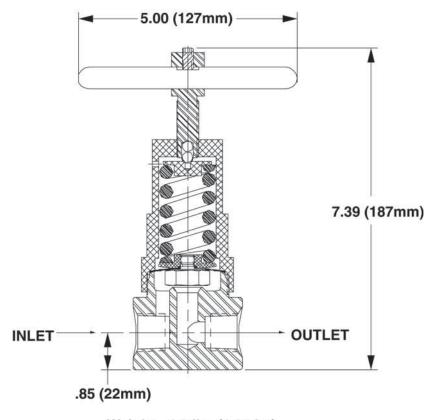

Weight - 4.3 lbs (1.95 kg)